


TP660P

Polycrystalline Solar Module
60 Cell Series

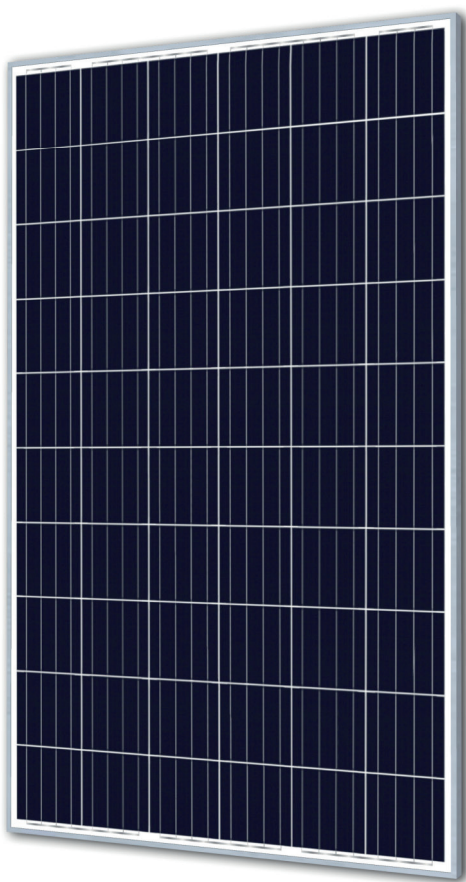

KEY FEATURES

275W

Highest power output

10 years

Material & workmanship warranty

PID Free

Certified by TUV Rheinland

25 years

Linear power output warranty

- Positive power tolerance: 0~+3%
- Robust design: Certified to withstand up to 2400 Pa wind load and up to 5400 Pa snow load
- Proved high reliability built on dozens of projects
- Four busbar cell: Improve the efficiency of modules

QUALITY WARRANTY

TALESUN guarantees that defects will not appear in materials and workmanship defined by IEC61215, IEC61730 and UL1703 under normal installation, use and maintenance as specified in Talesun's installation manual for 10 years from the warranty starting date.



CEC
Approved



ABOUT TALESUN

Suzhou Talesun Solar Technologies Co., Ltd. is one of the world's largest integrated PV manufacturers. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. With over 6 GW of modules installed globally, we are a leading solar energy company built upon proven product reliability and sustainable performance.

PERFORMANCE WARRANTY

Polycrystalline Solar Cell Modules

- During the first year, TALESUN guarantees the nominal power output of the product will be no less than 97.5% of the labeled power output.
- From year 2 to year 24, the nominal power decline will be no more than 0.7% in each year; by the end of year 25, the nominal power output will be no less than 80.7% of the labeled power output.

ELECTRICAL PARAMETERS

| Performance at STC (Power Tolerance 0 - +3%) | | | | |
|--|------|------|------|------|
| Maximum Power (P _{max} /W) | 260 | 265 | 270 | 275 |
| Operating Voltage (V _{mpp} /V) | 30.6 | 31.0 | 31.3 | 31.7 |
| Operating Current (I _{mpp} /A) | 8.50 | 8.56 | 8.63 | 8.69 |
| Open-Circuit Voltage (V _{oc} /V) | 37.9 | 38.2 | 38.5 | 38.7 |
| Short-Circuit Current (I _{sc} /A) | 8.97 | 9.04 | 9.09 | 9.17 |
| Module Efficiency η (%) | 15.9 | 16.2 | 16.5 | 16.8 |

| Performance at NOCT | | | | |
|--|------|------|------|------|
| Maximum Power (P _{max} /W) | 192 | 196 | 199 | 203 |
| Operating Voltage (V _{mpp} /V) | 28.3 | 28.7 | 28.9 | 29.2 |
| Operating Current (I _{mpp} /A) | 6.78 | 6.83 | 6.90 | 6.97 |
| Open-Circuit Voltage (V _{oc} /V) | 35.0 | 35.2 | 35.5 | 35.7 |
| Short-Circuit Current (I _{sc} /A) | 7.26 | 7.32 | 7.36 | 7.42 |

*STC: 1000W/m², 25°C, AM 1.5 *NOCT: 800W/m², 20°C, AM 1.5, Wind Speed: 1m/s

MECHANICAL SPECIFICATION

| | |
|---------------------------|---|
| Cell Type | Poly Crystalline |
| Cell Dimensions | 156.75*156.75mm(6inch) |
| Cell Arrangement | 60(6*10) |
| Weight | 18.5kg(40.8lbs) |
| Module Dimensions | 1650*992*35mm(64.96*39.06*1.38inch) |
| Cable Length | 900mm(35.4inch) |
| Cable Cross Section Size | 4mm ² (0.006sq.in) |
| Front Glass | 3.2mm High Transmission, Tempered Glass |
| No. of Bypass Diodes | 3/6 |
| Packing Configuration (1) | 30pcs/Pallet, 840pcs/40hq |
| Packing Configuration (2) | 30pcs+5pcs/Pallet, 910pcs/40hq |
| Frame | Anodized Aluminium Alloy |
| Junction Box | IP65/IP67 |



OPERATING CONDITIONS

| | |
|------------------------|----------------|
| Maximum System Voltage | 1000V/DC(IEC) |
| Operating Temp. | -40°C~+85°C |
| Maximum Series Fuse | 15A |
| Static Loading | 5400Pa |
| Conductivity at Ground | ≤ 0.1Ω |
| Safety Class | II |
| Resistance | ≥ 100MΩ |
| Connector | MC4 Compatible |

TEMPERATURE COEFFICIENT

| | |
|--|-----------|
| Temperature Coefficient P _{max} | -0.40%/°C |
| Temperature Coefficient V _{oc} | -0.31%/°C |
| Temperature Coefficient I _{sc} | +0.06%/°C |
| NOCT | 45±2°C |

I-V CURVE TP660P P_m(W)260



TECHNICAL DRAWINGS

